


REV	DATE	DESCRIPTION	DRAWN

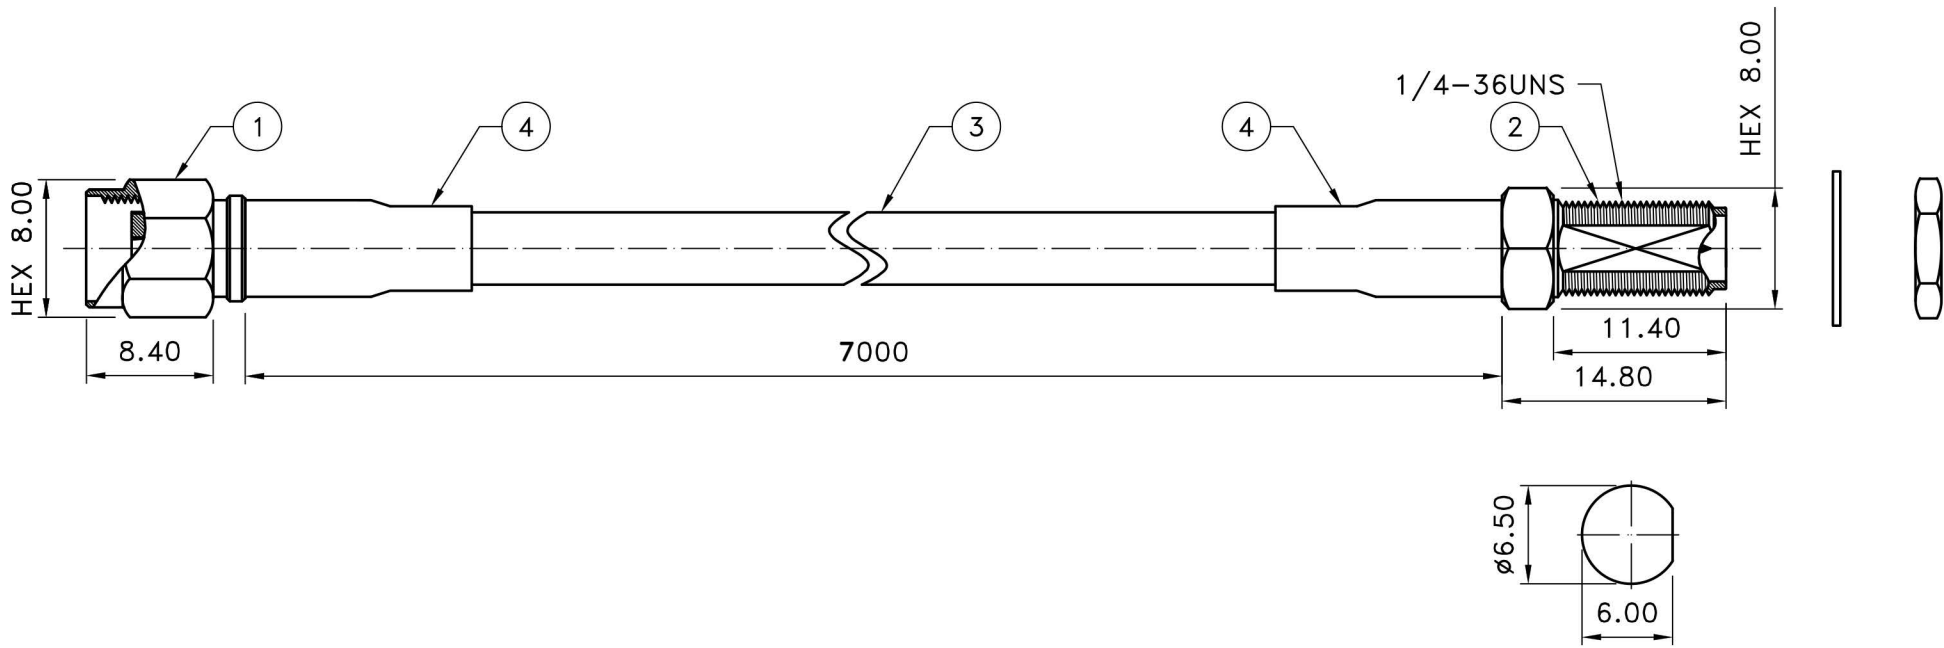

RECOMMENDED MOUNTING HOLE

NOTE:

- 1.RP SMA MALE CRIMP
 CENTER PIN GOLD PLATING 20μ THICK OVER NICKEL STRIKE
 BODY GOLD PLATING 3μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 PTFE : TOMBO No.9002
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
- 2.RP SMA FEMALE BULKHEAD CRIMP
 CENTER PIN GOLD PLATING 20μ THICK OVER NICKEL STRIKE
 BODY GOLD PLATING 3μ THICK OVER NICKEL STRIKE
 BRASS AND PTFE PER SGS
 PTFE : TOMBO No.9002
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
- 3.LOW LOSS 200A COAXIAL CABLE/3D
 ATTENUATION : 0.32dB/m@900MHZ 0.42dB/m@1800MHZ 0.61dB/m@3000MHZ
 CONDUCTOR : BARE COPPER WIRE/Ø1.12mm
 INSULATION : GAS-FPE/Ø2.95mm
 TAPE : BONDED ALUMINUM FOIL
 SHIELD : TINNED COPPER WARE/16*4*0.10mm/59% COVERAGE
 JACKET : PVC/Ø4.95mm

Prohibit re-circulating



TITLE
RP SMA MALE-RP SMA FEMALE

DRAWING NO.
RSMAP-RSMAJB-200-7.0

APPROVED	DRAWN DATE 06/22/17
----------	------------------------

CHECKED	SCALE 2:1
---------	--------------

DRAWN ALICE	UNIT mm
----------------	------------

NOTE

- 1.STRIP ALL BURRS.
- 2.ALL DIMENSIONS ARE AFTER PLATING.
- 3.DIAMETERS ON COMMON CENTERS.
TO BE CONCENTRIC WITHIN 0.1 T.I.R
- 4.CHAMFER 1ST & LAST THREADS 45°
- 5.BREAK ALL CONNERS & EDGES CO.15 MAX.

DIMENSION

UNLESS OTHERWISE NOTED TOLERANCES
 0.X=±0.2
 0.XX=±0.1
 CABLE LENGTH:
 L ≥ 10000 = +⁵⁰₀
 1000 ≤ L < 10000 = +³⁰₀
 L < 1000 = +⁸₀

NO	DESCRIPTION	MATERIAL	FINISH	Q'ty
4	D0176 (SHRINK TUBE)	PE	BLACK	2
3	LLC200	ASSY	BLACK	1
2	WL-SMA-2-BJRP200	BRASS	GOLD	1
1	WL-SMA-1-RP200	BRASS	GOLD	1