



WIFI-Link™ Technologies Inc.

歲海尼可網路科技有限公司

WEB:<http://www.wifi-link.com.tw/> TEL:06-2523801 FAX:06-2526033

TECHNICAL DATA

ELECTRICAL PROPERTIES

FREQUENCY RANGE	2.4 ~ 2.5 GHZ
IMPEDENCE	50Ω
VSWR	≤2
GAIN	802.11B 5DBI
RADIATION	OMNI
POLARIZATION	VERTICAL
ELECTRICAL WAVE	λ/4 DIOPLE
CONNECTOR	802.11B SMA PLUG REVERSE
wire	

MECHANICAL PROPERTIES

ANTENNA COVER	TPU
color	BLACK
OPERATION TEMPERATURE	-20 ~ +60 °C
STORAGE TEMPERATURE	-30 ~ +75 °C

RETURN LOSS




WIFI-Link™ Technologies Inc.

歲海尼可網路科技有限公司

WEB: <http://www.wifi-link.com.tw/> TEL: 06-2523801 FAX: 06-2526033

▶1: Reflection /M Log Mag 10.0 dB/ Ref 0.00 dB

▶2: Off

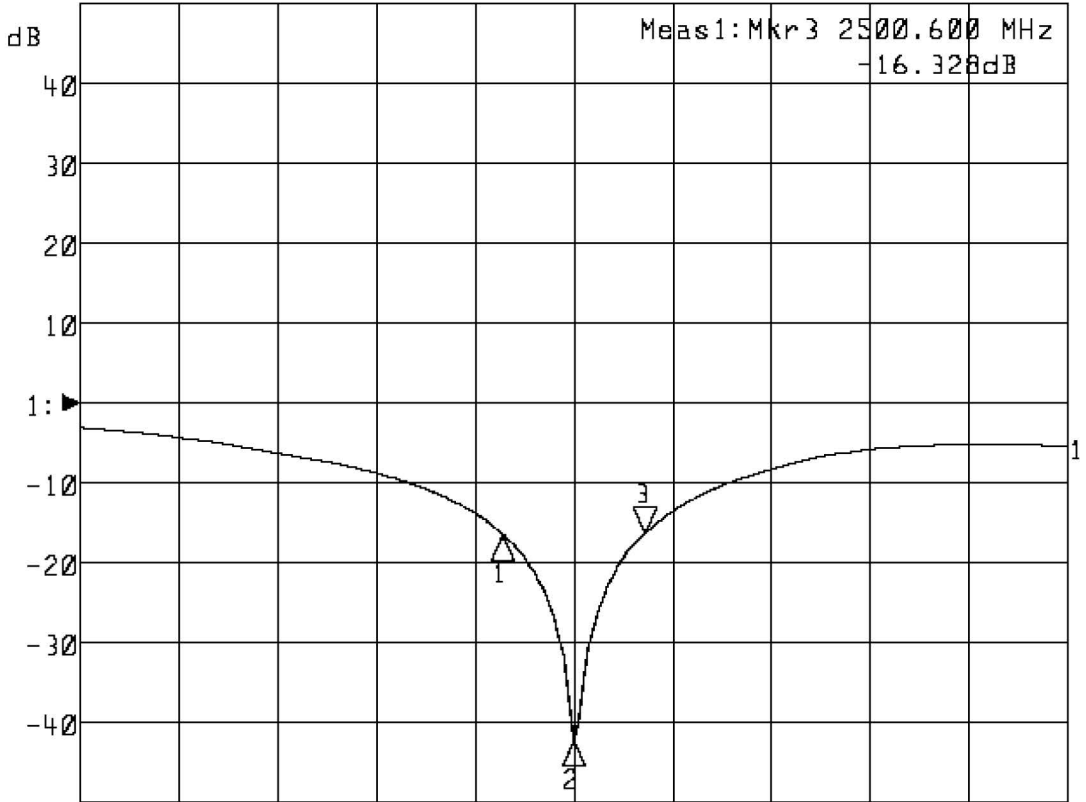

Start 2 100.000 MHz

Stop 2 800.000 MHz

1: Mkr (MHz)	dB	2: Mkr (MHz)	dB
1: 2400.0000	-16.447		
2: 2450.0000	-42.301		
3: 2500.6000	-16.328		




WIFI-Link™ Technologies Inc.

歲海尼可網路科技有限公司

WEB:<http://www.wifi-link.com.tw/> TEL:06-2523801 FAX:06-2526033

H-PLANE 2.45GHZ=4.876dbi

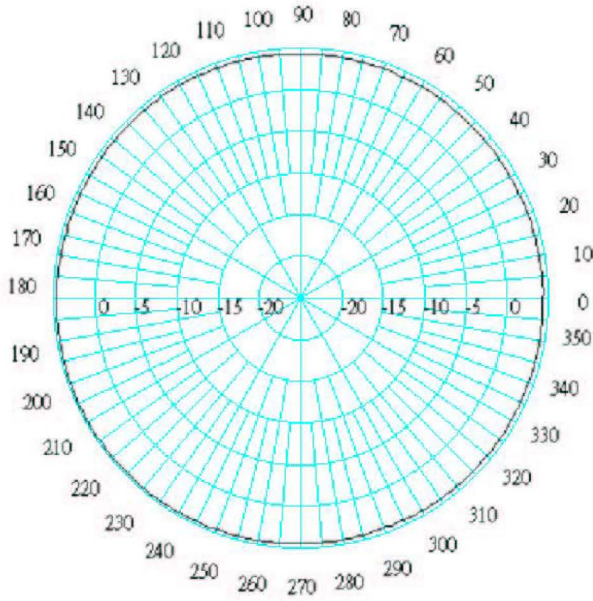

E-PLANE 2.45GHZ=4.397dbi

