



WIFI-Link™ Technologies Inc.

歲海尼可網路科技有限公司

WEB: <http://www.wifi-link.com.tw/> TEL: 06-2523801 FAX: 06-2526033

5dBi 全向天線(4G)+磁鐵基座 2.5 公尺線

WLMB-1726-05-03

APPLICATIONS AND FEATURES

Applications:

- 698~960MHz-1.71~2.7 GHz ISM Band
- Multi-point application
- Public Wireless Hotspot
- Wireless Video Systems

Features :

- Superior performance
- Light weight
- Easy set up
- 1m cable
- Mage Base
- 360 degree OMNI directional



SPECIFICATIONS:

Electrical Specifications


Frequency Range	698~960MHz 1.71~2.7 GHz
V.S.W.R	≤3.0
Antenna Type	Collinear
Gain	5dBi
Polarization	Vertical
Maximum Power	50W
Vertical Beam-with	35°
Horizontal Beam-with	360°
Impedance	50Ω

Mechanical Specifications

Length	331mm
Mage Base Diameter	50mm
Weight	130g
Wind Survival	N/A
Radome Material	Black ABS
RoHS Compliant	Yes
Operating Temperature	-40°C to +80°C
Clamps	N/A
Mounting	N/A
Cable	2.5m
Connector	SMA MALE


TESTING REPORT

V.S.W.R

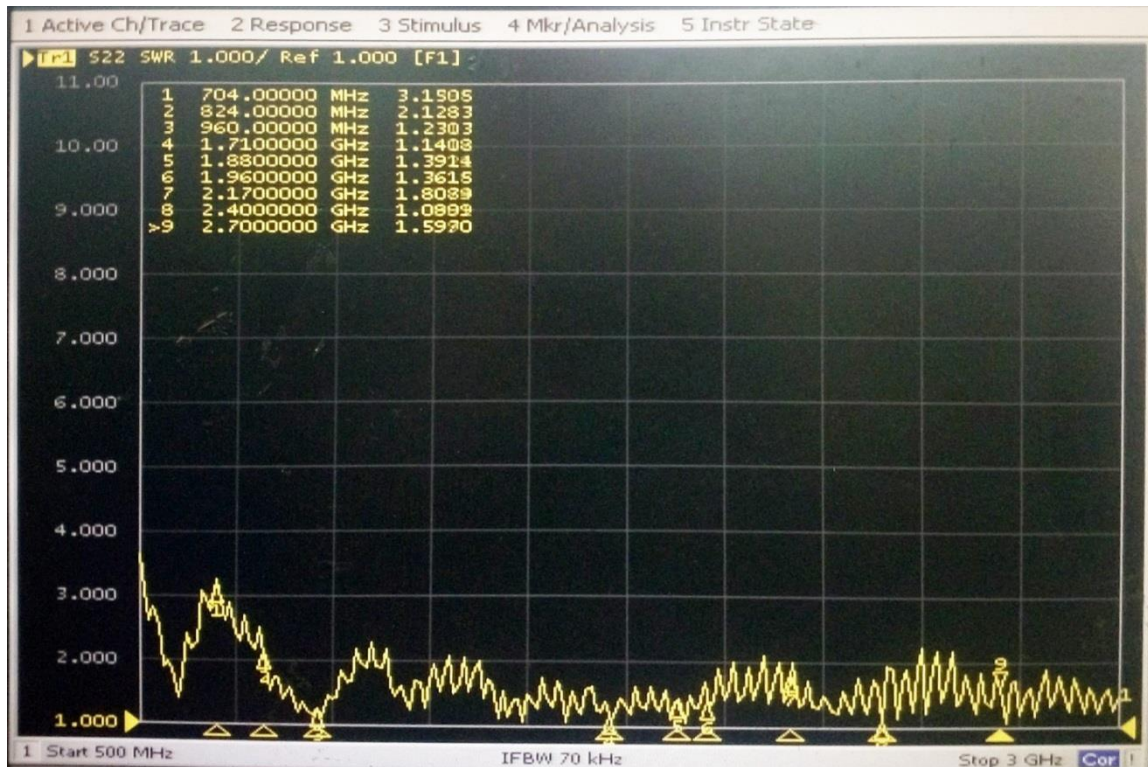

Antenna Vertical & Horizontal Pattern

Horizontal

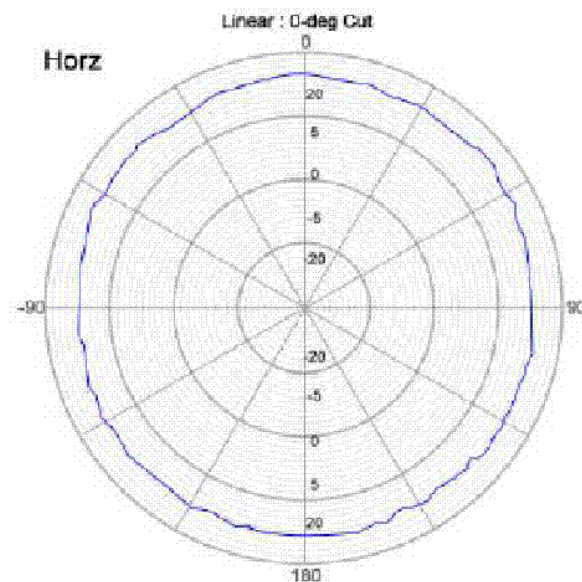

WIFI-Link™ Technologies Inc.


歲海尼可網路科技有限公司

WEB: <http://www.wifi-link.com.tw/> TEL: 06-2523801 FAX: 06-2526033

RoHS

Compatible

SIGN	DATE	DESCRIPTION	APPROVER
△			

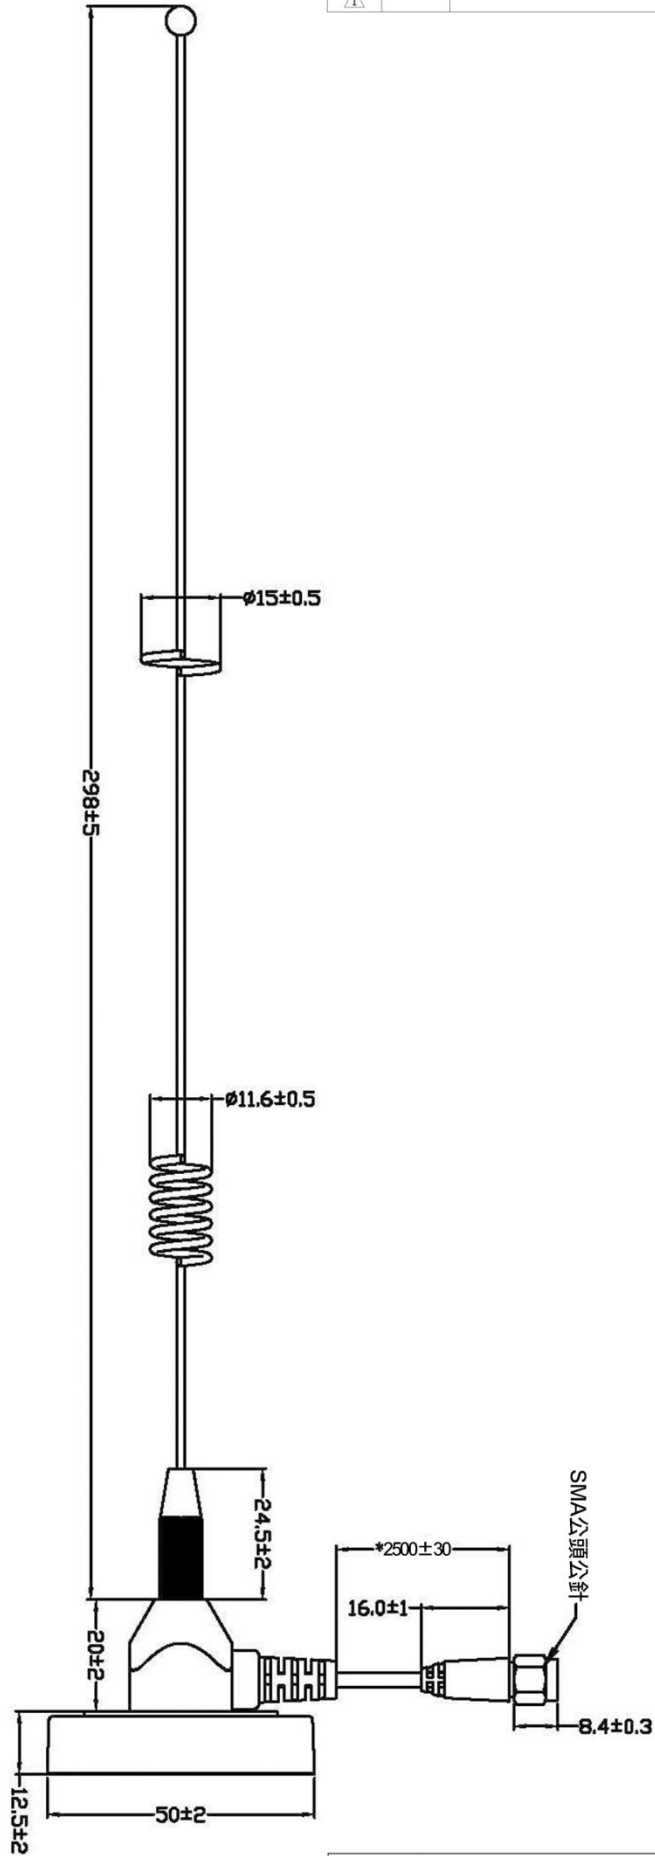

WIFI-Link™ Technologies Inc.

威海尼可網路科技有限公司

TITLE: 5dBi全向天線(4G)+磁鐵基座2.5公尺線

PART NO: WLMB-1726-05-03 DWG NAME: WLMB-1726-05-03

APPROVED BY	CHECKED BY	DESIGNED BY	Tolerance
		Xumingwen	X.X ±0.2
		2013/05/13	X.XX ±0.1
			X° ±1°

UNITS: mm
SCALE: 1/1
REVISION: A